풀

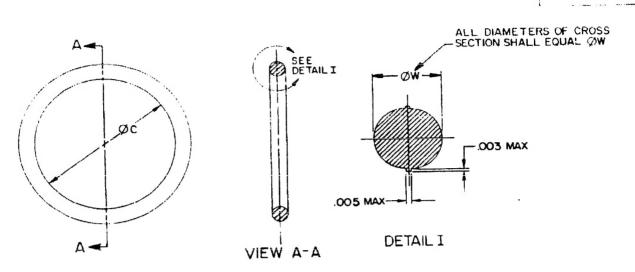


TABLE I TYPE NUMBURS AND DIMENSIONS.

DASII	<b>U</b> :		Ø ¥		HATTER, AL	SENCETAL SATA
NO	MIN	MAX	MIN	MAX		INACTIVE FOR NEW DESIGN USE
	. 359	. 169	.067	.073	ZA REDOLINGARA SEE	5590064-10
- 7	. 565	.585	. 157	. 060		INACTIVE FOR NEW DESIGN USE MERGOGA-11
-3	.669	.679	. 100	.106		The special right
-4	د 85.	.865	، ئانى ،	.143		INACTIVE FOR NEW DESIGN USE: MS90064-12
- :	1, 333	1.143	.383	.095		INACTIVE FOR NEW DESIGN USE ME90064-13
-6	1.545	1.555	.089	.095		INACTIVE FOR NEW DESIGN USE MS90064-14
-7	2.099	2.119	.135	.143		INACTIVE FOR NEW DESIGN USE MS90064-15
	2.678	2.588	.110	.120		INACTIVE FOR DESIGN USE MS90064-16
9	5,440	1,990	. ::: :	+-,215		INACTIVE FOR NEW DESIGN USE 12:00:06 1 - 1.7
-10	.421	.431	.367	.073	SIII: ROQUIRBASAT BB	
-11	565	.085	.057	.063		
12	.915	.927	.136	.142		
-13	1.133	1.34?	. 259	.095		
-14	1.545	1.555	.589	.095		
	2.099	2,110	.15	(4)		
6	1,648	2 698	1 : 0	. 1 24.		
1	1.08	4.	1	1	- <b>-</b>	

## (F) ENTIRE STANDARD REVISED

INCH - POUND

PREPARING ACTIVITY NAVY-EG

CUSTODIANE APPY ME

AIR FORCE - 99 DLA -

REVIEW IS

user crimcins.82,85 marked to bear 1000 in 0.800 MILITARY SPECIFICATION SHEET

PACKING, PREFORMED, ROUND (FOR USE WITH WAVEGUIDE FLANGES AND DUMMY LOADS! SPECIFICATION SHEET NUMBER MS90064F

11 JUNE 1990 SUPERSEDING 29 FEB 88

MS90064E AMSO --

Fad - 3830

Page

Form Approved

OMB No 0704-0188

88 672 MAY Form חח

A approved for table

releige, digital ution, a unimited

품

Ħ

Form Approved OMB No. 0704-0188


CPC

1969-606-945

## REQUIREMENTS:

- MATERIAL:

   A. COPPOSITION RUBBER SHALL BE CLASS B IN ACCORDANCE WITH MIL-P-25712.
  - B. UNLESS OTHERWISE SPECIFIED, MATERIAL SHALL BE SILICONE RUBBER CLASS 25, GRADE 10 IN ACCORDANCE WITH 22-R-765, FOR WAVEGUIDE FLANCES; AND SILICONE RUBBER IN ACCORDANCE WITH AMS1304 FOR LUPRY LOADS.
- 2. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
- 3. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.



NS90064-10W INDICATES - PACKING, PREFORMED, ROUND (FOR USE WITH MAVEGUIDE FLANCES)
DIAMETER "ØC" .421 HIN., .431 MAX: "ØW" .067 MIN., .073 NAX.

## NOTES:

- ALL DIMERSTONS ARE IN INCHES.
- 2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HERDIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
- 3. REFERENCED COVERNMENT (OR NON-COVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEPENDE FIDEX OF SPECIFICATIONS AND STRADARDS (DODIES) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

SPECIFICATION SHEET NUMBER PREPARING ACTIVITY NAVY-FC MILITARY SPECIFICATION SHEET MS90064F 11 JUNE CUSTODIANS ARMY - MA NAUY . LAGRING, PEEFORMED, HOUND AR FORCE - 99 .,4, 29 FEB 88 (FOR USE WITH WAVEGUIDE MS90064E REVIEW. IS FLANGES AND DUMMY LOADS) USER CRIMCINS,82,85 AMSC-FSC - 5330 PROJECT NUMBER 5330-0833 STRIBUTION STATEMENT Page 2 A Approved for public relense; distribution is unlimited of